





NTN DRIVESHAFT ANDERIU, INC.

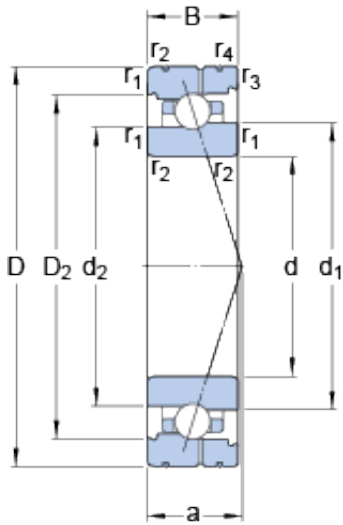

90 mm x 140 mm x 24 mm SKF 7018
ACB/P4AL angular contact ball bearings

Bearing No. 7018 ACB/P4AL

7018 ACB/P4AL Bearing 2D drawings and 3D CAD models

Size	140x90x24 mm
Bore Diameter	140 mm
Outer Diameter	90 mm
Width	24 mm
d	90 mm
D	140 mm
B	24 mm
d ₁	108.7 mm
d ₂	106.13 mm
D ₂	125 mm
b	2.2 mm
C ₁	13.4 mm
C ₂	5.2 mm
C ₃	4.2 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1 mm
a	39 mm
d _a - min.	97 mm
d _b - min.	97 mm
D _a - max.	133 mm
D _b - max.	135.4 mm
r _a - max.	1.5 mm
r _b - max.	1 mm
d _n	110 mm



NTN DRIVESHAFT ANDERIU, INC.

Basic dynamic load rating - C	27 kN
Basic static load rating - C ₀	23.6 kN
Fatigue load limit - P _u	0.93 kN
Limiting speed for grease lubrication	11000 r/min
Limiting speed for oil lubrication	17000 mm/min
Ball - D _w	10.319 mm
Ball - z	25
G _{ref}	14.1 cm ³
Calculation factor - e	0.68
Calculation factor - Y ₂	0.87
Calculation factor - Y ₀	0.38
Calculation factor - X ₂	0.41
Calculation factor - Y ₁	0.92
Calculation factor - Y ₂	1.41
Calculation factor - Y ₀	0.76
Calculation factor - X ₂	0.67
Preload class A - G _A	160 N
Preload class B - G _B	320 N
Preload class C - G _C	960 N
Calculation factor - f	1.07
Calculation factor - f ₁	0.99
Calculation factor - f _{2A}	1
Calculation factor - f _{2B}	1.01
Calculation factor - f _{2C}	1.04
Calculation factor - f _{HC}	1
Preload class A	142 N/micron
Preload class B	183 N/micron



NTN DRIVESHAFT ANDERIU, INC.

Preload class C	275 N/micron
d_1	108.7 mm
d_2	106.13 mm
D_2	125 mm
C_1	13.4 mm
C_2	5.2 mm
C_3	4.2 mm
$r_{1,2}$ min.	1.5 mm
$r_{3,4}$ min.	1 mm
d_a min.	97 mm
d_b min.	97 mm
D_a max.	133 mm
D_b max.	135.4 mm
r_a max.	1.5 mm
r_b max.	1 mm
d_n	110 mm
Basic dynamic load rating C	35.8 kN
Basic static load rating C_0	40 kN
Fatigue load limit P_u	0.93 kN
Attainable speed for grease lubrication	11000 r/min
Attainable speed for oil-air lubrication	17000 r/min
Ball diameter D_w	10.319 mm
Number of balls z	25
Reference grease quantity G_{ref}	14.1 cm ³
Preload class A G_A	160 N
Static axial stiffness, preload class A	142 N/ μ m
Preload class B G_B	320 N
Static axial stiffness, preload class B	183 N/ μ m
Preload class C G_C	960 N



NTN DRIVESHAFT ANDERIU, INC.

Static axial stiffness, preload class C	275 N/ μ m
Calculation factor f	1.07
Calculation factor f_1	0.99
Calculation factor f_{2A}	1
Calculation factor f_{2B}	1.01
Calculation factor f_{2C}	1.04
Calculation factor f_{HC}	1
Calculation factor e	0.68
Calculation factor (single, tandem) Y_2	0.87
Calculation factor (single, tandem) Y_0	0.38
Calculation factor (single, tandem) X_2	0.41
Calculation factor (back-to-back, face-to-face) Y_1	0.92
Calculation factor (back-to-back, face-to-face) Y_2	1.41
Calculation factor (back-to-back, face-to-face) Y_0	0.76
Calculation factor (back-to-back, face-to-face) X_2	0.67
Mass bearing	1.25 kg